

**18 1PXL COVE LIGHT XR CW/WW CAN BE DAISY CHAINED PER LED ENGINE SMART 100W INDOOR.**



**9 1PXL COVE LIGHT XR DW CAN BE DAISY CHAINED PER LED ENGINE SMART 100W INDOOR.**

**170 1PXL COVE LIGHT XR CAN BE DAISY CHAINED PER CONTROLLER OUTPUT (512 DMX CHANNELS).**

**CABLING LENGTHS**


A to B: 100 meters  
CONTROLLER to first FIXTURE.

C to D: 30 meters  
POWER SUPPLY to last FIXTURE in chain.

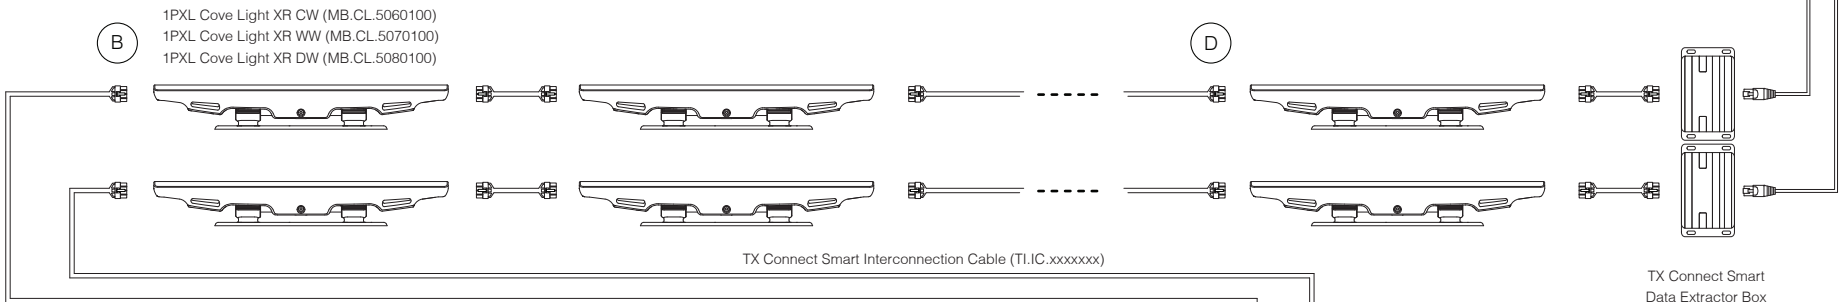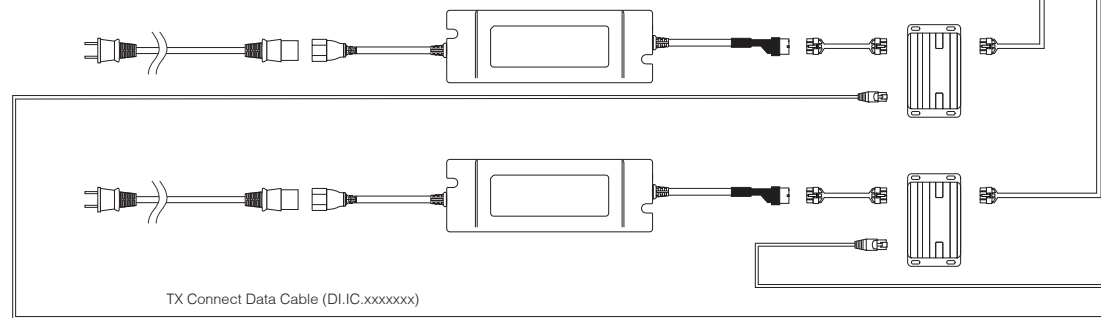


TX Connect Smart Data Extractor Box (TI.DO.0000100)

Light-Drive JOG DW (SC.JD.5080000) BLACK (SC.JD.5080100) WHITE



CONTROLLER  
Powered by LED Engine via TX Connect Data Cable

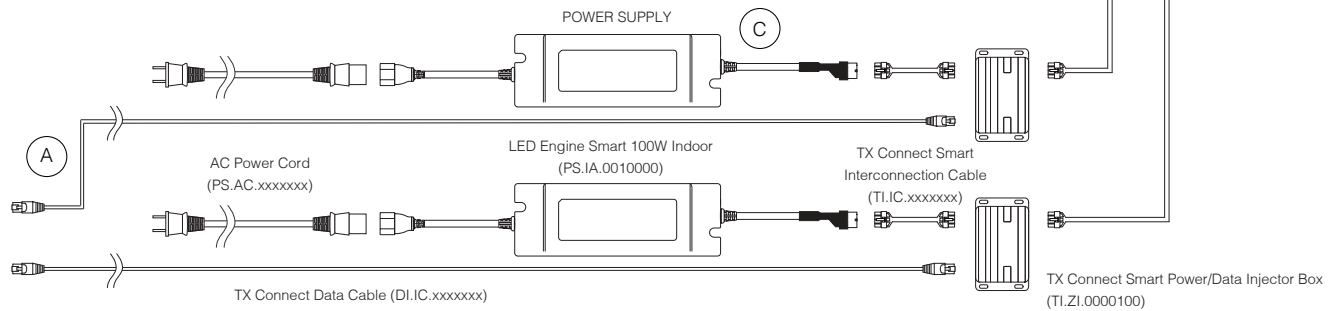

Please check for the latest updates and changes on the TRAXON website.  
© 2008, 2009 TRAXON TECHNOLOGIES. ALL RIGHTS RESERVED.  
[WWW.TRAXONTECHNOLOGIES.COM](http://WWW.TRAXONTECHNOLOGIES.COM)

TITLE :	SYSTEM WIRING DIAGRAM
PRODUCTS :	1PXL COVE LIGHT XR CW/WW/DW LED ENGINE SMART 100W INDOOR LIGHT-DRIVE JOG DW

DATE :	3/7/2009
DWG BY :	YHL
SCALE :	NOT TO SCALE
PAGE :	1 OF 1
VER :	1.1